



State	Proj. No.	Sheet No.
MD		

Cost of movement gauge complete-in-place will be considered contractually covered by the contract unit price for Safety Barrier Curb.


## PART ELEVATION OF BARRIER CURB SHOWING MOVEMENT GAUGE

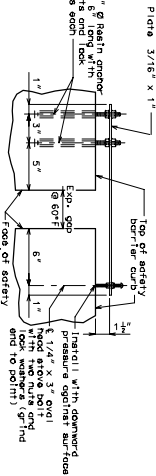


## R-BAR PERMISSIBLE ALTERNATE SHAPE

(\*) The R1 and R2 bar combination may be furnished as one bar, as shown, at the contractor's option. (All dimensions are out to out.)


(\*\*\*) The R3 bar and #5 bottom transverse slab bar in cantilever (P/S panels only) combination may be furnished as one bar as shown, at the contractor's option.



### PART PLAN SHOWING SAFETY BARRIER CURB JOINT



FILED JOINT  
DETAIL



## DETAILS OF PLASTIC WATERSTOP


**Notes:**

Plastic waterstop shall be placed in all safety barrier curb filled joints, except structures with superavation. Use on all lower safety barrier curb joints only.


Cost of plastic water stop, complete-in-place will be considered completely covered by the contract unit price for Safety Barrier Curb.

Detailed  
Checked

**Note: This drawing is not to scale. Follow dimensions.**

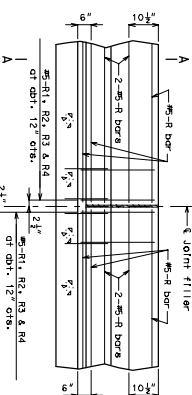

(CAST-IN-PLACE CONVENTIONAL FORMING OPTION).



PART SECTION A-A

**Notes:**

The cross-sectional area above the slab = 2.28 sq. ft.

**Neoclassical** Top of safety barrier curb shall be built up to grade with a 1:2 slope from the curb face to the base of the barrier, and the barrier shall be to grade.

**All** All exposed ends of safety barrier curb shall have a 1:2 slope of 3/8" level, unless otherwise noted.


**Payment for all** Payment for all concrete and reinforcement shall be based on the volume of concrete actually placed for the contract unit price for safety barrier curb per linear foot.

**Concrete in the safety barrier curb** Concrete in the safety barrier curb shall be class **SV**.

**Minimum safety barrier curb** The minimum safety barrier curb for all structures, measured along the outside face of the curb, shall be 12" wide at the end of the curb and of varying to the outside face of the curb.

MI

PART SECTION SHOWING  
RUSTICATION DETAILS



CREATED IN MICROSTATION